

DDM 10/10

E6G3602 1F 6P 1V +SCT

Technical Data

DDM 10/10 E6G3602	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
1F 6P 1V +SCT	(2)	[N15/N16]	515	6	1~		50/60	952	3.8	800



Technical Data

DDM 10/10 E6G3602	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
1F 6P 1V +SCT	25	450	IP55	F	EXT	50	21	1.2	B	6M02N1

- (1) = Speed controllable via Transformer
- (2) = Speed controllable via TRIAC or Transformer
- (3) = Speed controllable via Inverter
- * = No speed control available
- [HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves

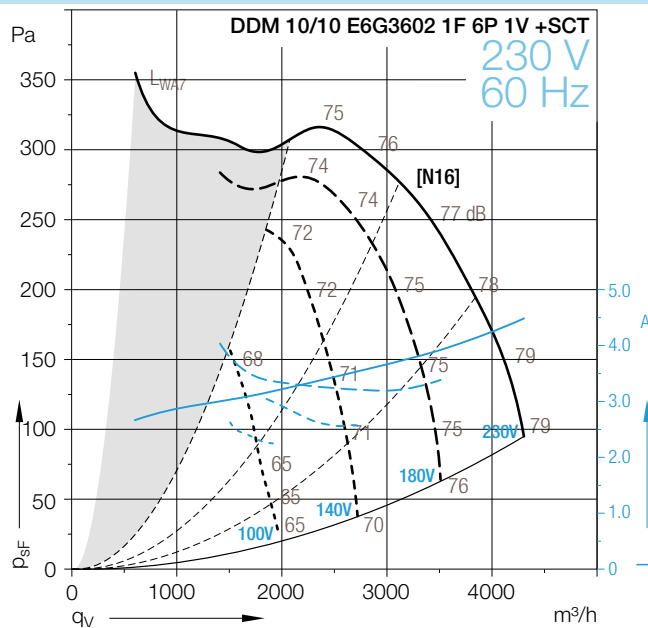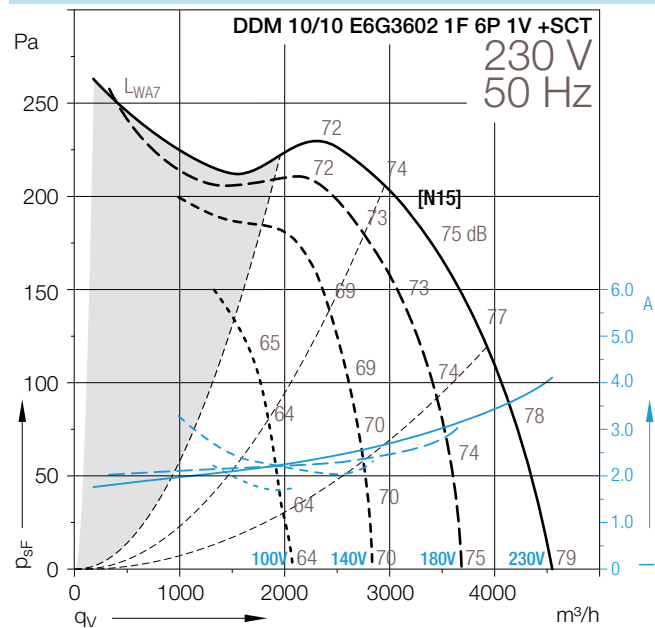

Dimensions in mm, Subject to change.

DDM 10/10 E6G3602 1F 6P 1V +SCT

